

lifting the quality of life

Melody I

Platform lift

staircare




Melody I

Non-enclosed Lifting Platform

The Melody 1 Lifting Platform offers an aesthetically pleasing solution to the problem of short-rise vertical wheelchair access outside and inside public buildings (or, where appropriate, domestic household situations). The innovative design ensures that special emphasis has been placed on the needs of both the lift user and the building owner in facilitating compliance with the current disability legislation.

Complies with Part M of the Building Regulations and meets the requirements of the Disability Discrimination Act

- Open and unobtrusive design
- No enclosure or support tower required
- Easy to operate, tactile, illuminated constant pressure controls
- On car emergency lowering facility
- Lift carriage finished in attractive, durable stainless steel
- RAL colours available as an option
- Minimal builders work (ground ramp eliminates requirement for a pit)
- Pit option available for internal use if required
- Security options available e.g. Radio Enabler, Radio Isolate and Authorised Key Holder
- Internal platform dimensions: 800mm x 1400mm (standard)
- BS 6440 & CE compliant

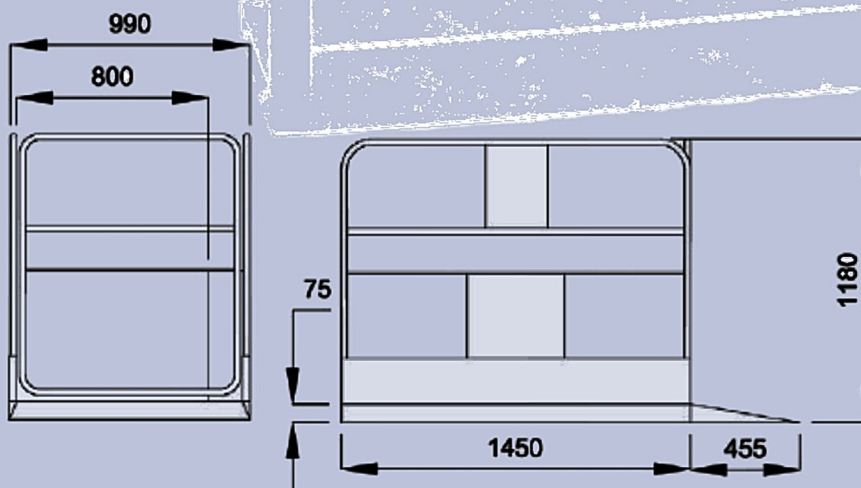

Standard Specification

- Application range: can be sited internally or externally for People with impaired mobility and wheelchair users.
- Maximum safe working load: 250kg
- Closed height: 75mm
- Maximum height served: 1000mm
- Power supply electrical requirements: 220 / 240V ~ 50 / 60 Hz 13A single phase
- Low voltage control system: 24V DC
- Operating temperature range: -10 degrees C to + 40 degrees C
- Safety: full platform safe edge which stops the lift should it touch any obstacle in the down direction only, fully interlocked upper and lower gates and full battery back-up. Constant pressure controls and Emergency lowering facility.
- Drive: bellows enclosed hydraulic scissor mechanism